

Alarm Controls | 2020



Access. Value. Today.




Experience a safer
and more open world

600WP

Weatherproof Magnetic Gate Lock

Magnetic gate lock with 600 lbs of holding force provides weatherproof access control for perimeter applications. Ideal for sliding or swinging gates.

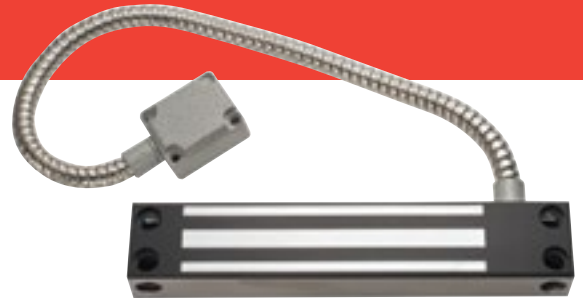

Features

Standard Features

- 12" color coded leads in armored cable with metal end cap
- Use 23/64" diameter drill for blind nuts provided with lock
- Self-drilling TEC screws
- Non-aluminum parts are plated to resist corrosion
- Top mount or side mount with brackets (order separately)
- Completely sealed in stainless steel case
- Ideal for sliding or swinging gates
- Clear anodized (US28) finish standard
- Limited lifetime warranty

Specifications

Holding Force

- 600 lbs

Dimensions

- Magnet size: 8-21/32" L x 1-9/32" H x 1-1/8" W
- Armature size: 7-9/32" L x 1-21/32" H x 1/2" W

Electrical

- Operates on 12 or 24 VDC, field configurable
- Current draw: 500 mA at 12 VDC, 250 mA at 24 VDC

Operating Temperature

- +14 to +131F [-10 to +55C]

1200S, 1200L, 1200LB

Single Magnetic Lock



Bracket mounted magnetic lock with 1200 lbs of holding force that can be easily installed without special tools and used with any access control system. Ideal for high-use areas for traffic control in interior or exterior applications. Available with LED, bond sensor and door status signalling options.

Features

Standard Features

- **1200S** Standard magnetic lock
- **1200L** Magnetic lock with indicating LED
- **1200LB** Magnetic lock with indicating LED, bond sensor and door status sensor
- Built-in arc suppression
- Instant release, no hysteresis
- Self-drilling TEC screws
- Non-aluminum parts are plated to resist corrosion
- E-Z mount header bracket and template provided for easy installation, no special tools required
- Can be used with any access control system
- Clear anodized (US28) finish standard
- Limited lifetime warranty

Options

- **DURO** Duranodic finish (US 40) available, specify when ordering.
- Dress covers in polished chrome and brass available. See "Magnetic Lock Accessories" for options.

Specifications

Certifications & Listings

- UL 294 listed
- UL 10C fire rated
- CAN/ULC-S104 fire door conformant
- ULC-S527 listed
- UL 864 listed

Holding Force

- 1200 lbs

Dimensions

- Magnet size: 10-1/2" L x 2-7/8" H x 1-1/2" W
- Armature size: 7-1/4" L x 2-3/8" H x 5/8" W

Electrical

- 12 or 24 VDC, field selectable
- Current draw: 505 mA at 12 VDC, 260 mA at 24 VDC
- 1200LB bond sensor has SPDT 3A relay contacts

Operating Temperature

- +14 to +131F [-10 to +55C]