

Stranded General Purpose Un-shielded Cable
18AWG 4/C - CM

RoHS Compliant


Cables are manufactured to meet current NEC guidelines and are verified by outside standards organizations including (UL)us.

Standard Compliance:

UL 444

Applications

Designed for use in security and alarm systems connecting keypads, sounders/strobes, intercoms, control panels, audio and more.

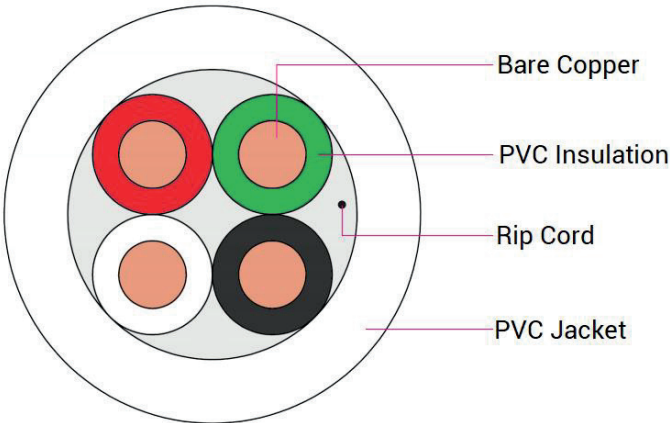

Specifications

MODELO	LP418W/1000
Construccion:	
Conductor	18AWG Solid Bare Copper
No. of Conductors	4
Insulation Type	PVC
Color	Black , Red , Green , White
Nominal Thickness	0.30 mm
Diameter	1.60 mm
Rip Cord	Yes
Jacket Type	PVC
Color	White (Other colors are available)
Nominal Thickness	0.40 mm
Nominal Diameter	5.00 mm
Electrical & Properties:	
Temperature Rating	-20 to 75°C
Operating Voltage	300 Volts max.
Capacitance	530 PF
DC Resistance	21.40 Ohms/KM @20°C
Flame Rating	UL 1685 (Vertical Tray), CM
Packing:	
Standard Packaging	1000ft Easy Pull Box