



Electric Cabinet Lock

Instructions For Lock Mode Change



1. Remove the 4 screws on the bottom.
2. Remove base plate and solenoid.
3. Turn assembly 180 ° and re-route wires to cut out.
4. Install into housing and insert the 4 screws.

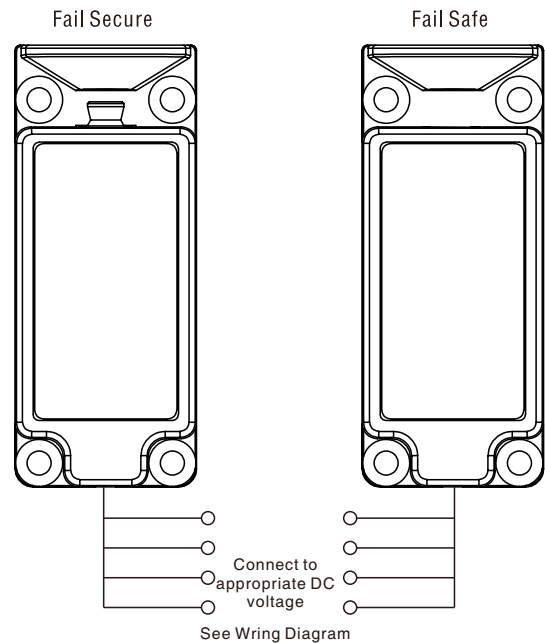


Overall and Mounting Dimensions

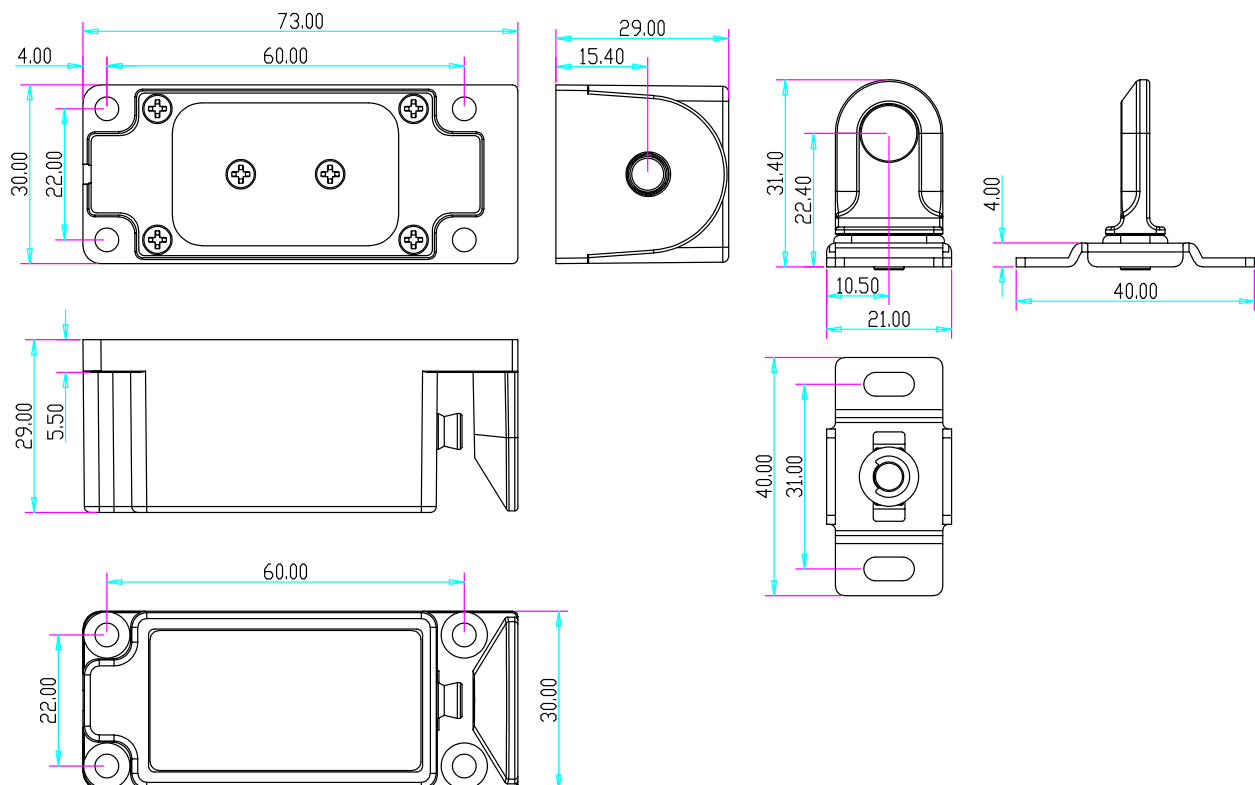


Installation Dimensions

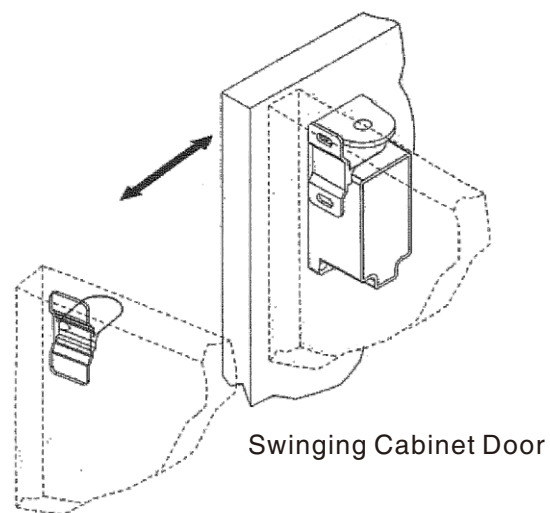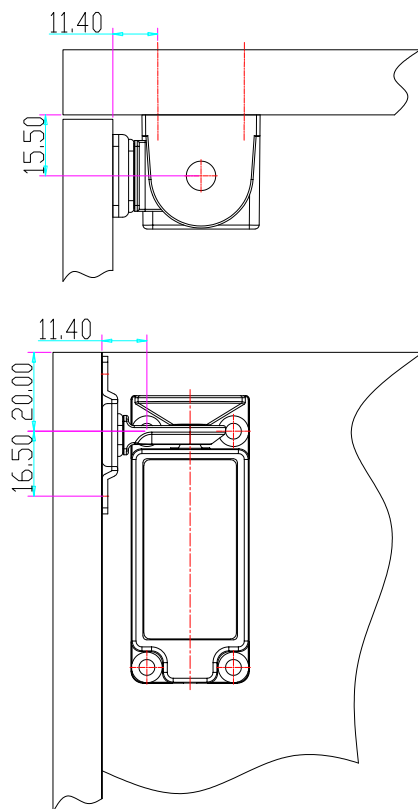

Swinging Cabinet Door

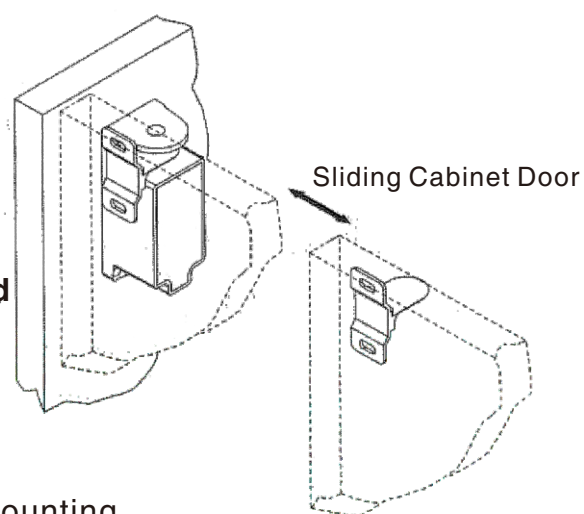


Sliding Cabinet Door

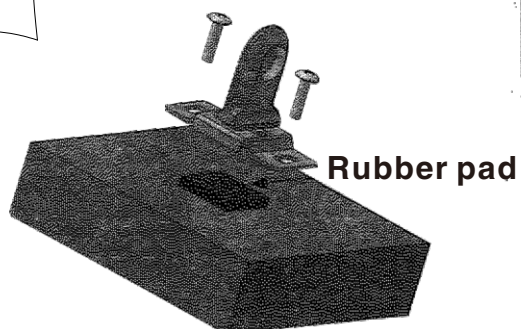

Install rubber pad in between the mounting surface and catch to secure catch position

Cabinet Lock Dual Voltage Wiring Diagram

A.12V DC Input 220mA

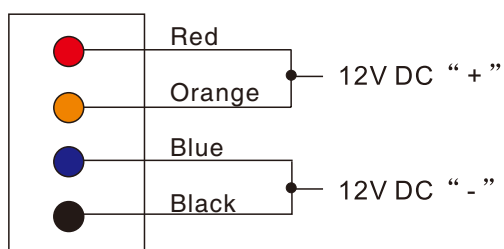

A.24V DC Input 110mA

