

DS-TMP00C-A**Charging Cable type 2 to type 2**

- Charging plug: according to IEC62196-1 2022、IEC62196-2 2022 standard


▪ Specification

Protection Property	
Leakage Protection	leakage current $\leq 5\text{mA}$
Input Electrical Property	
Input Voltage	480V
Rated Input Current	32A
Output Electrical Property	
Output Voltage Range	480V
Output Current Range	32A
Environmental Property	
Protection Level	IP55 (working state), IP67 (non-working state)
Others	
Charging Interface	IEC62196-1 2022; IEC62196-2 2022
Charging Cable Length	5m
Cable Specifications	$5 \times 6\text{mm}^2 + 1 \times 0.75\text{mm}^2$
Sheath Material	Black TPU
General	
Weight (with Package)	3.5 kg (7.7 lb.)
Dimensions (with Package)	390 mm $\times$ 390 mm $\times$ 80 mm (15.4" $\times$ 15.4" $\times$ 3.1")
Working Environment	-35°C to 50 °C (-31°F to 122°F)

▪ Available Model

DS-TMP00C-A22(5m)(EU)

▪ Dimension

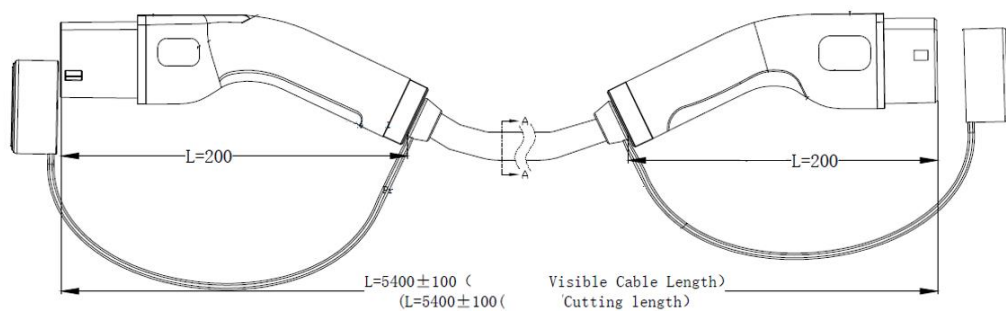

Cable specification: $5 \times 6\text{mm}^2 + 1 \times 0.75\text{mm}^2$ Sheath material: Black TPU

See Far, Go Further



www.hikvision.com
support@hikvision.com

