

DS-TCP440-B 4 MP iBeacon Parking Guidance Camera



- Built-in high-performance algorithm, supporting ANPR (accuracy $\geq 99.5\%$), detection of the parking space status (accuracy $\geq 99.99\%$), and smart analysis of crossing over line, motion detection, etc.
- HD 4.0 MP camera, applied in environment with low illumination such as underground garage.
- 3D noise reduction to guarantee clean and exquisite image.
- Smart detection of the parking space status, and smart analysis of crossing over line, motion detection, etc.
- Energy-saving LED with high brightness and low consumption.
- Speed recognition in second accuracy to indicate the parking space status in real time and provide accurate available parking space number
- Network wiring with easy connection, installation, and maintenance.
- ROI encoding.
- Two RJ45 interfaces, supporting connecting cameras in series, and no power cord is needed.
- Built-in iBeacon module, supporting indoor positioning and navigation with the help of APP. iOS or Android SDK is provided.

▪ Specification

Camera	
Sensor Type	1/3" Progressive Scan CMOS
Max. Resolution	2560 × 1440
Min. Illumination	Color: 0.019 Lux @ (F1.9, AGC OFF) B/W: 0.011 Lux @ (F1.9, AGC OFF)
Day/Night Switch	Supported
Shutter	1 to 1/100,000 s
Number of Detected Parking Space	Max 3
Lens	
Lens Type	2.8 mm 4 mm
Aperture	2.8 mm : F2.0 4 mm : F2.0
Focal Length & FoV	2.8 mm, horizontal FoV: 103.7±5°, vertical FoV: 56.1±5°, diagonal FoV: 121.8±5°, 4 mm, horizontal FoV: 81.3±5°, vertical FoV: 43.9 ±5°, diagonal FoV: 97±5°
Focus	Fixed
Image	
WDR	140db
Defog	supported
Main Stream	50 Hz: 25 fps (2688 × 1520, 1920 × 1080, 1280 × 720)
Sub-Stream	50 Hz: 25 fps (1920 × 1080, 1280 × 720, 704 × 576, 640 × 480)
Image Settings	Saturation, brightness, contrast, white balance, and gain are adjustable by client, software or web browser.
Day/Night Switch	Auto/Scheduled/Manual
WDR Switch	On, Time, Brightness
Frame Rate	25fps
Video	
ROI	8 regions respectively for main stream and sub-stream, 6 levels for each region.
Video Compression	H.265/H264/MJPEG
H.264 Type	Low profile Medium profile High Profile
Video Bit Rate	32 Kbps to 16 Mbps
Bit Rate Type	Constant, Variable
Scalable Video Coding (SVC)	MJPEG , H.265 and H.264 encoding
Capture Parameters	
Image Format	JPEG
Capture Resolution	2560 x 1440 (default) 2688 × 1520, 1920 × 1080, 1280 × 720
Smart Recognition	vehicle entering/exiting parking space status, parking space status detection, Intelligent Detection
Capture Picture Overlay	Lane No., Capture Time, Anti-counterfeiting Code, Capture No., Vehicle Entry/Exit Direction, etc

Network	
Network Storage	NAS (NFS, SMB/CIFS), auto network replenishment (ANR) together with high-end Hikvision memory card, memory card encryption and health detection are supported
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNSDDNS, RT, RTSP, RTCP, NTP, SNMP , OTAP
API	ONVIF(PROFILE S, PROFILE G), ISAPI, SDK
Client	HikCentral, SDKdemo, DS-TPM400
Web Browser	Plug-in required live view: IE10+ Plug-in free live view: Chrome 57.0+, Firefox 52.0+, Safari 11+ Local service: Chrome 41.0+, Firefox 30.0+
Security	One-key restoration, password protection, watermark
Compression Standard	
Video Compression	H.265/H.264/MJPEG
Video Bit Rate	32 Kbps to 16 Mbps
Network Function	
Smart Functions	Built-in AI deep-learning algorithm, supporting ANPR and parking space detection.
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, UPnP, SNMP, FTP, 802.1x, QoS, HTTPS (SIP, SRTP, and IPv6 optional)
Interface	
Indicator Interface	3*LED lamp interface
Network Interface	2 RJ45 10 M/100 M/1000 M self-adaptive Ethernet interface
General	
Resolution	4 MP
Consumption	Max. 6.5 W
Power Supply	Hikvision PoE, or 12 to 24 VDC wide-range voltage
Weight	0.525 kg (1.1 lb.)
Dimensions	170 × 121 × 105 mm (6.7 × 4.8 × 4.2 inch)
Weight (with Package)	1 kg (2.2 lb.)
Dimensions (with Package)	275 * 205 * 175 mm(10.8 * 8.1 * 6.9 inch)
Working Temperature and Humidity	-20 °C to 70 °C (-4 °F to 158 °F) 5% to 95% @ 40°C (non-condensing)
Working Environment	90% or less (non-condensing)
Storage Temperature and Humidity	Temperature: -20 °C to 70 °C (- 4°F to 158 °F) Humidity: 95% (non-condensing)
Language	33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian

Smart Function

ANPR Supported Country/Region

Middle East:

The United Arab Emirates (Abu Dhabi, Ajman, Dubai, Fujairah, Ras Al Khaimah, Sharjah and Umm Al Quwain), Qatar, Iraq, Egypt, Jordan, Kuwait, Saudi Arabia, Pakistan, Oman, Lebanon, Bahrain

Africa:

Nigeria, Kenya, Ivory Coast, South Africa, Tanzania, Mauritius, Morocco, Tunisia, Sierra Leone, Zambia, Ghana, Zimbabwe, Uganda, Angola, Ethiopia, Senegal, Algeria

Asia-Pacific:

Australia, New Zealand, Indonesia, Malaysia, Singapore, South Korea, Thailand, Vietnam, the Philippines, HongKongChina, Macao, TaiwanChina, Myanmar, India, Mongolia, Cambodia, Laos, Bangladesh, Nepal, Sri Lanka

America:

Canada, Argentina, Chile, Paraguay, Uruguay, El Salvador, Bolivia, Colombia, Brazil, Ecuador, Peru, Mexico, Panama, Costa Rica, Trinidad and Tobago, the Dominican Republic, Guatemala

Europe:

Turkey, Croatia, Slovakia, Czech Republic, Bulgaria, the Republic of North Macedonia, Hungary, Greece, Poland, France, Netherlands, Switzerland, Spain, the UK, Ireland, Germany, Italy, Austria, Israel, Palestinian, Belgium, Luxembourg, Albania, Serbia, Romania, Montenegro, Denmark, Finland, Sweden, Slovenia, Portugal, Malta, Cyprus, Iceland, Liechtenstein, Bosnia and Herzegovina

Speaking Regions:


Azerbaijan, Belarus, Kazakhstan, Lithuania, Georgia, Estonia, Latvia, Ukraine, Moldova, Uzbekistan, Kyrgyzstan, Armenia, Turkmenistan, Tajikistan

Available Model

DS-TCP440-B(E)(2.8mm)


DS-TCP440-B(E)(4mm)

Dimension

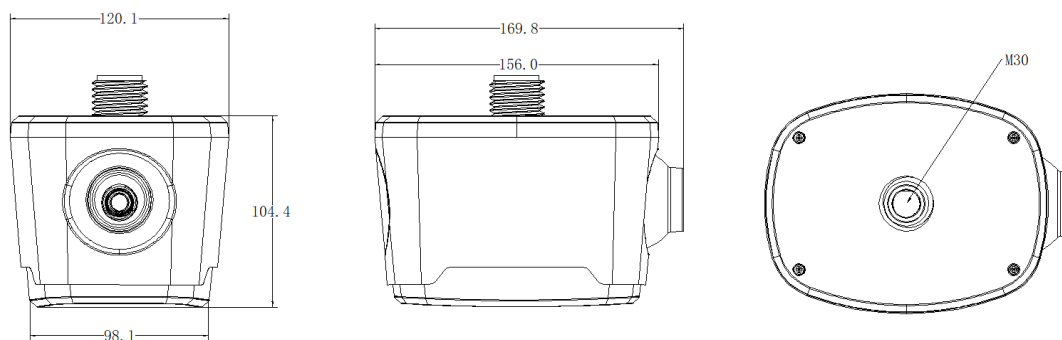

▪ Accessory

▪ Optional

L800-R35 Parking camera extension bar	L300-R35 Parking camera extension bar	DS-2270XYZ-WC Prevent camera from leaking water	Parking Guidance Camera Junction Box
			


▪ Installation

Camera Lens	Distance (m)	Height (m)	Cover Parking Space/Len
2.8mm	2.5-6.0m	2.3m-2.8m	1-3 spaces
4mm	4.0-8.0m	2.3m-2.8m	1-3 spaces


Note: The distance should be greater than the height

Installation Recommendation

Single Len:

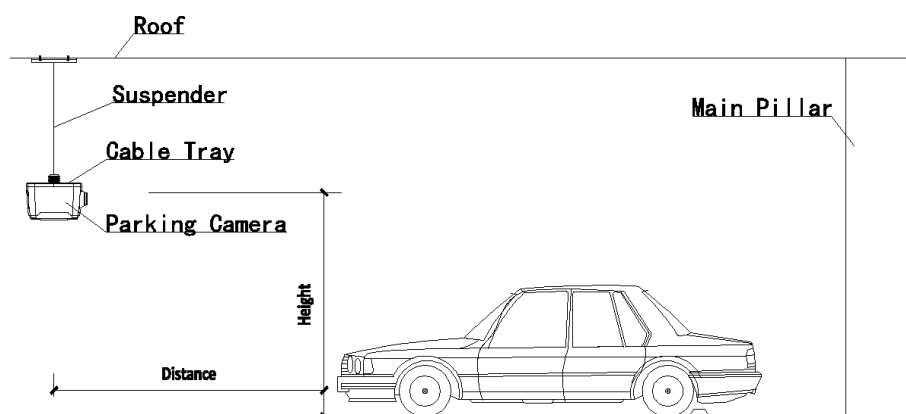

▪ Typical Application

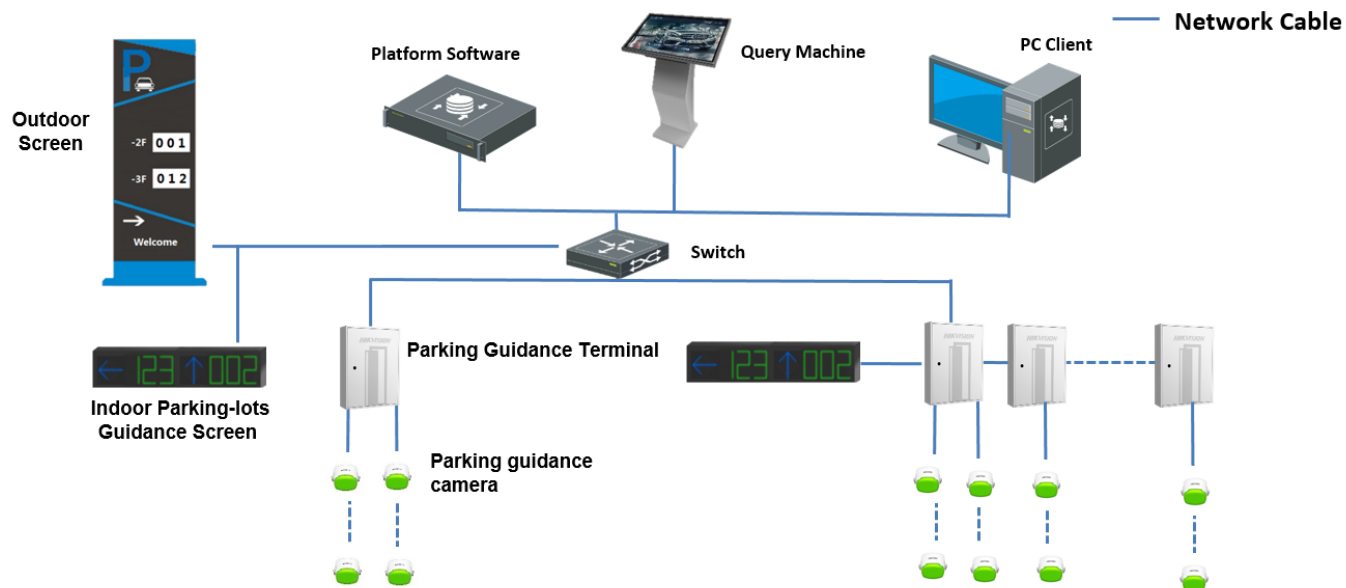

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq