

MR-Q3-600LE-D2(HI)

Autonomous Mobile Robot



Key Feature

- Self-localization navigation: adopts inertial, 2D barcode, laser and visual SLAM navigation methods to achieve accurate positioning.
- Supports smooth motions like forward, backward, and rotation via dual-wheel differential drive.
- Smart power management: supports multi-level electrical threshold, auto-charging, and self-returning after charging completed.
- Multi-safety protection: includes front laser obstacle avoidance, side ultrasonic obstacle avoidance, bumper strip detection, emergency stop button, etc.
- Human-machine interaction: indicates the device status via touchscreen, sound and indicators.
- Supports lifting, carrying, rotating and lowering goods up to 600 kg (1322.77 lb.).
- Wireless communication: supports Wi-Fi and seamless roaming in a network covered area.

Typical Application

Automobile, 3C, manufacturing, logistics, food, medicine, etc.

Available Model


MR-Q3-600LE-D2(HI)

Accessory


Charging station model: MR-RA-CH-48/30B-CI(CE)



Dimension

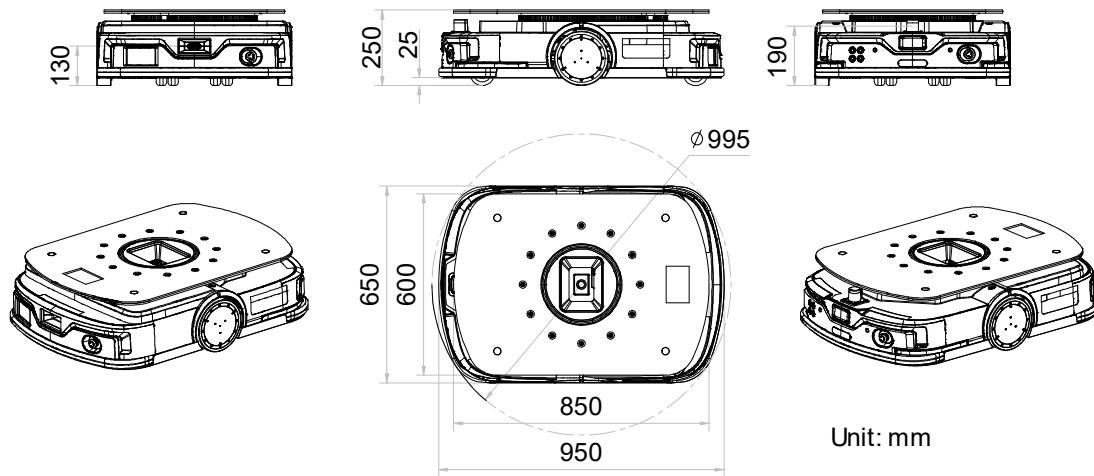

Charging Station Deployment

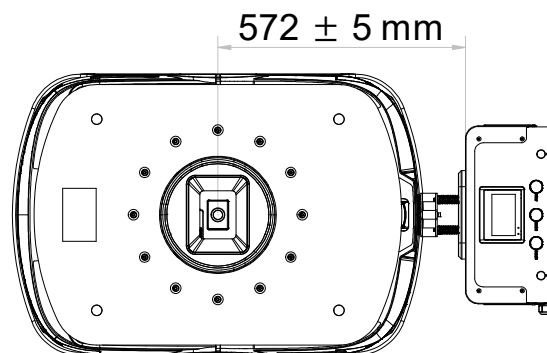

Specification

Model			MR-Q3-600LE-D2(HI)	
Basic Parameter				
Dimension (L × W × H)			950 mm × 650 mm × 250mm (37.40" × 25.59" × 9.84")	
Rotation Diameter			995 mm (39.17")	
Chassis Above Ground			25 mm (0.98")	
Distance Above Ground from Charging Port			130 mm (5.12")	
Charging Distance			572 mm (22.52")	
Lifting Platform Dimension			850 mm × 600 mm (33.46" × 23.62")	
Lifting Stroke			60 mm (2.36")	
Lifting Structure Type			Electric	
Weight			128 kg (282.19 lb.)	
Rated Load			600 kg (1322.77 lb.)	
Navigation Mode			Laser SLAM/2D barcode/Visual SLAM (ground texture)	
Human-Machine Interaction			Touchscreen	
Safety Protection				
Front	Laser Obstacle Avoidance	Installation Height	190 mm (7.48")	
		Scanning Angle	260°	
		Max. Detection Range	10 m (393.70")	
Bumper Strip Type			Mechanical	
Emergency Stop Button			Support	
Motion Performance				
Rated Running Speed (Empty)			2000 mm/s	
Rated Running Speed (Rated Load)			1800 mm/s	
Rated Acceleration (Empty)			1000 mm/s²	
Rated Acceleration (Rated Load)			500 mm/s²	
Rotation Speed (Empty)			200°/s	
Rotation Speed (Rated Load)			100°/s	
Gradeability			3°	
Positioning Angle Accuracy			± 1°	
Positioning Accuracy			± 10 mm (± 0.39")	
Battery Performance				
Battery Type			LiFePO4	
Rated Voltage			48 V	
Charging Cycle			1500 times (for fully charging and discharging)	
Run Time			6 h to 8 h	
Charging Time			≤ 1.5 h (for fully charging and discharging)	