

DS-TMT102-K Video Intercom Station




- Supports reading M1 card (Frequency: 13.56 MHz)
- Support real-time video intercom function, integrated echo suppression and noise cancellation technology
- Support scan Bar code, QR code

▪ Specification

Authentication	
Card Reading Distance	0 to 5 cm
Capacity	
Card Capacity	50,000
Event Capacity	50,000
Lens	
Lens Type	4mm
Card Reader	
Card Reader Type	M1 card
Card Reader Frequency	13.56MHz
Camera	
Max. Resolution	4MP
Sensor Type	1/3" Progressive Scan CMOS
Scan and Recognition	
Recognition Distance	0 to 26 cm(QR code) 0 to 22 cm(Bar code)
Recognition Type	Bar code, QR code
Interface	
Alarm Input	4
Alarm Output	4
Wiegand	4
Network Interface	1
General	
Power Supply	POE 40-57 V 0.6 A
Dimensions	190 × 128 × 1250 mm (7.48 × 5.04 × 49.21 inch)
Weight	7.22 kg (15.92 lb.)
Weight (with Package)	9.94 kg (21.91 lb.)
Dimensions (with Package)	407 × 310 × 1360 mm (16.02 × 12.20 × 53.54 inch)

▪ Dimension

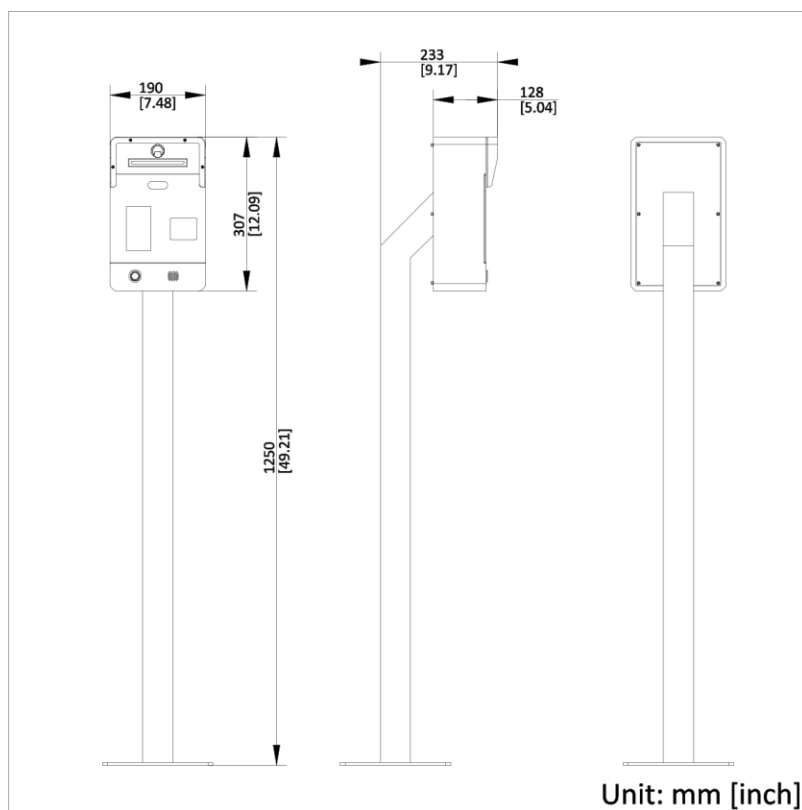

See Far, Go Further



www.hikvision.com
support@hikvision.com

